

# Linear Vibrating Screen

## DU 2.4x6.1 SD Ba, DU 2.4x6.1 DD Ba



thyssenkrupp



## Advanced design for economic operation

### Proven quality – great flexibility – cost effectively

thyssenkrupp banana screens classify according to the principle of thin layer screening. They are designed to handle high throughputs with high separation efficiencies. They meet versatile requirements like dry and wet screening and dewatering of bulk materials such as hard rock, limestone, gravel, coal, ore, sand and salt. The constant infinitely variable stroke and the vibration isolation frame to decrease forces acting on the foundation are only two of interesting key features.

### Features

#### Screen tray

- Bolted design without any welding at the side walls ensures maximum fatigue strength

#### Screen decks

- Blind deck in the feed zone to compensate impact loads
- Clamping arrangement for the screen cloths
- Perforated plates, polyurethane panels or woven wire available

#### Wear protection

- Replaceable liners on screen side walls and frame cross members
- Replaceable panels at the feed area, back plate and discharge lip

#### Adjustability

- Constant infinitely variable stroke

#### Optional vibration isolation frame

- Vibration isolation frame for reduction of dynamic loads during the operation of the screening machine
- Mitigation of dynamic loads by steel springs

#### Optional electric brake

- Electric brake for fast passing through the resonance ranges after deactivating the screen drive

#### Optional dedusting hood or spraying system

#### Drive system

- Double out-of-balance drive with shafts on which adjustable unbalance discs operate in opposite directions to achieve a straight-lined oscillation path
- Intermediate gear including V-belt drive, V-belt guard, motor base plate and squirrel cage motor
- Universal joint shaft including coupling for connecting the main shaft with the intermediate shaft

# Linear Vibrating Screen

## DU 2.4x6.1 SD Ba, DU 2.4x6.1 DD Ba

### Technical Specification

#### General data

Materials:	Hard rock, limestone, ore, coal etc.
Maximum feed size:	up to 300 mm edge length, depending on feed material, cut size and type of screen covering

#### Screen


Type of screen:	Linear vibrating screen
Screen execution:	Banana type
Screen area dimension (a x b):	2.4 m x 6.1 m
Screen area (per deck):	14.9 m <sup>2</sup>
Screen trough length – single deck:	7.0 m
– double deck:	7.2 m
No. of decks:	1 or 2
Inclinations:	25° / 15° / 5°
Number and size of exciter:	1 x 4
Main dimensions (l x w x h) – single deck:	6,930 mm x 3,370 mm x 3,300 mm
– double deck:	7,160 mm x 3,370 mm x 3,750 mm
Main dimensions (L x W x H)* – single deck:	7,030 mm x 3,430 mm x 4,130 mm
– double deck:	7,260 mm x 3,430 mm x 4,580 mm
Total weight – single deck:	up to 13
– double deck:	up to 17
Total weight* – single deck:	up to 19
– double deck:	up to 25

#### Drive


Drive concept:	V-belt
Motor power	up to 37 kW

\*Main dimensions and total weight with vibration isolation frame

#### Working principle

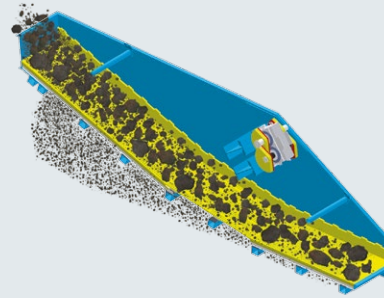

#### Main dimensions

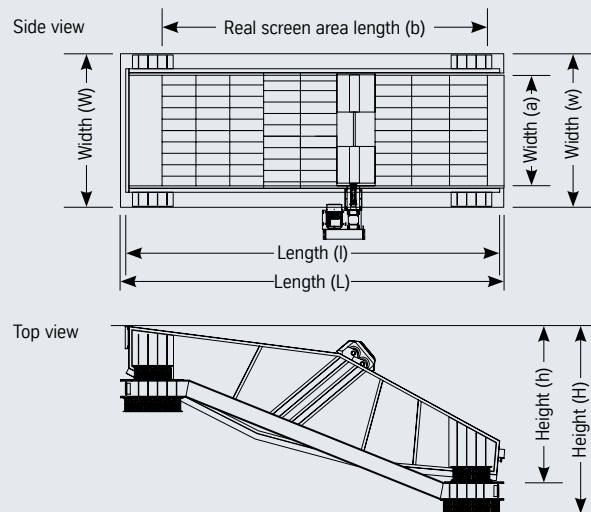

### Contact

thyssenkrupp Industrial Solutions AG  
Resource Technologies

Graf-Galen-Straße 17  
59269 Beckum, Germany  
Phone: +49 2525 99-0  
E-mail: [smb.tkis-rt@thyssenkrupp.com](mailto:smb.tkis-rt@thyssenkrupp.com)  
[www.thyssenkrupp-industrial-solutions.com](http://www.thyssenkrupp-industrial-solutions.com)

Sales representative

© 2016 Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustration purposes only. The operation values are considered to be approximate and will be finally determined on the basis of the specific task and the material characteristics. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and thyssenkrupp makes no other warranty of accuracy, reliability, completeness, merchantability or fitness for any purpose, express or implied. Products and services listed may be trademarks, service marks or trade-names of thyssenkrupp and/or its subsidiaries in Germany and other countries. All rights are reserved.