



Distinct machinery for highest class products

Proven design – highest flexibility – best product qualities

With the MULTIPOL®, thyssenkrupp Industrial Solutions has taken the lead in the market for the supply of multiple hearth furnaces, particularly in the refractories industry. The multiple hearth furnace is ideally suited for the **thermal treatment of both fine raw materials and mechanically unstable raw materials**. MULTIPOL® makes it possible to precisely keep the temperature profiles and the respective retention times such that the highest product qualities can be obtained. When it comes to high product quality, the extraordinarily efficient MULTIPOL® is the best choice for all calcination processes.

The MULTIPOL® consists of a steel shell with a refractory lining, refractory-lined hearths, a supporting structure, the furnace top platform and the central shaft with drive train. The material fed into the plant is conveyed to the dropholes in the counterflow to the gas flow by means of rabble arms via the alternately arranged out- and in-hearth. This ensures an excellent heat transfer between material and gas phase while being able to adjust the retention time. The air-cooled rabble arms are mounted to the central, air-cooled hollow shaft.

Part of the cooling air serves as preheated combustion air for the up to four burners per level, thus ensuring a high energy efficiency.

The quality of the product can be controlled and adjusted according to the requirements (reactivity, specific surface, loss on ignition, residual CO₂, etc.) by means of the temperature profile of each individual hearth.



MULTIPOL[®] Multiple hearth furnace

Fields of application

Calcination of industrial minerals, e.g. magnesite, dolomite, bauxite, limestone and clay

Calcination of flotation concentrates and filter cakes

Thermal treatment of ores (molybdenum, nickel, copper, vanadium, zinc), biomass and electronic scrap

Main features

Moisture content of over 50% (e.g. filter cake) possible

High flexibility

Temperature profiles (± 5 °C) precisely adjustable

Suitable for very fine materials with a grain size of 0 to 40 mm

Insensitive to quality fluctuations in the material used

Operation at up to 1150 °C

Oxidising and reducing operating mode is possible

Suitable for liquid and gaseous fuels, including low-calorific gas

Low maintenance and operating costs

No product loss due to exhaust gas filter dust recycle, in contrast to conventional calcining systems


Design parameters

Outside diameter: 4.5 to 7.8 m

Number of hearths: 6 to 19 hearths

Daily output: up to 300 tons

Feed material size: 0 to 40 mm

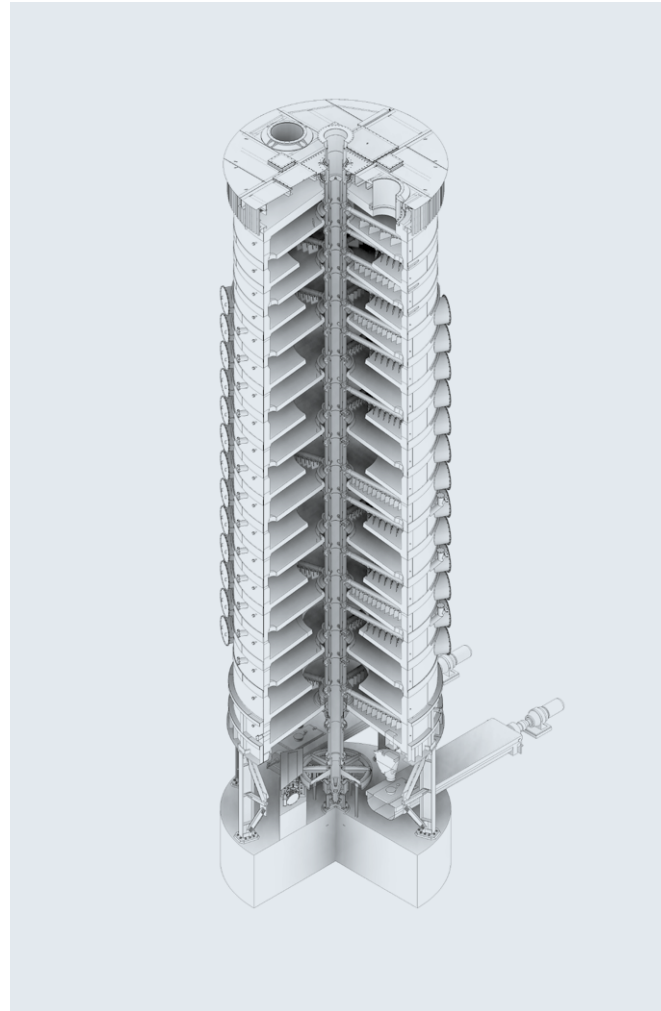

Contact

thyssenkrupp Industrial Solutions AG

Graf-Galen-Straße 17

59269 Beckum, Germany

Phone: +49 2525 99-0

E-mail: pyro.tkis@thyssenkrupp.com

www.thyssenkrupp-industrial-solutions.com/pyroprocessing

Sales Agent

© 2016 Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustration purposes only. The operation values are considered to be approximate and will be finally determined on the basis of the specific task and the material characteristics. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and thyssenkrupp makes no other warranty of accuracy, reliability, completeness, merchantability or fitness for any purpose, express or implied. Products and services listed may be trademarks, service marks or trade-names of thyssenkrupp and/or its subsidiaries in Germany and other countries. All rights are reserved.